



SIP Wall-mounted Terminal

Features:

- ▶ This network terminal with built-in digital amplifier 2*15 and 2*30 at high quality sound
- ▶ Empowered by high-speed dual-core (ARM + DSP) chip of industrial grade, startup in less than 1s
- ▶ Compact in Size and easy to install
- ▶ Support MP3, WMA, WAV and more decoding
- ▶ With a standard RJ45 network interface and supports online firmware upgrade from long distance


POE Power adaptor

From POE router

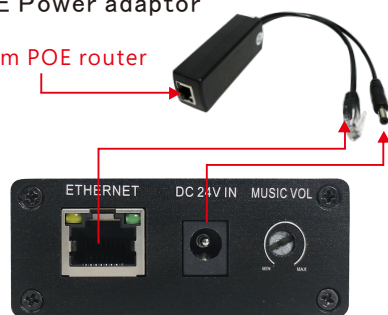

If you need bigger power, can link audio output to external booster amplifier

to 2pcs of 8 ohm speaker at 15W



Model	IPT-215POES	IPT-230S
Network Communication Protocol	SIP	SIP
Network Interface	10/100Base-TX, RJ45	10/100Base-TX, RJ45
RMS Power	2*15W	2*30W@8 Ω
Decoding	MP3/WMA/WAV	MP3/WMA/WAV
Frequency Range	20Hz~20KHz	20Hz~20KHz
POE adaptor	Yes	0~85°C
Operating Temp.	0~85°C	No
Power consumption	Less than 300mW	Less than 300mW
Power Supply	DC 12-24V or POE	DC 24V
Dimension	100 x 66 x 26 mm	153 x 100 x 26 mm