

2 & 4 -CH Bluetooth Wall Amplifier with LCD Display

Description:


This 2-4 channel small bluetooth multi-home audio system equipped with micro USB/TF can power 2 to 8 pieces of speakers in your home or small commercial area. It uses a high-efficiency class-D amplifier for a maximum output of 2*20 or 4*20 watts, low-impedance speakers. The cool display shows relevant track music info. Plus, you can control everything - seek, change tracks, and adjust the volume - using the included wireless infrared remote controller.



Features:

- ▶ Adopt Bluetooth wireless connection technology
- ▶ Built-in all-digital auto-tuning radio, 30 radio stations
- ▶ Standard 86 Mounted on the wall for easy control
- ▶ With wireless remote control
- ▶ Support linkage trigger doorbell input
- ▶ High sensitivity touch buttons
- ▶ Support audio input and output function with secure and fast connect phoenix connectors
- ▶ Suitable for homes, commercial areas, kid's room, etc.

BA-220X

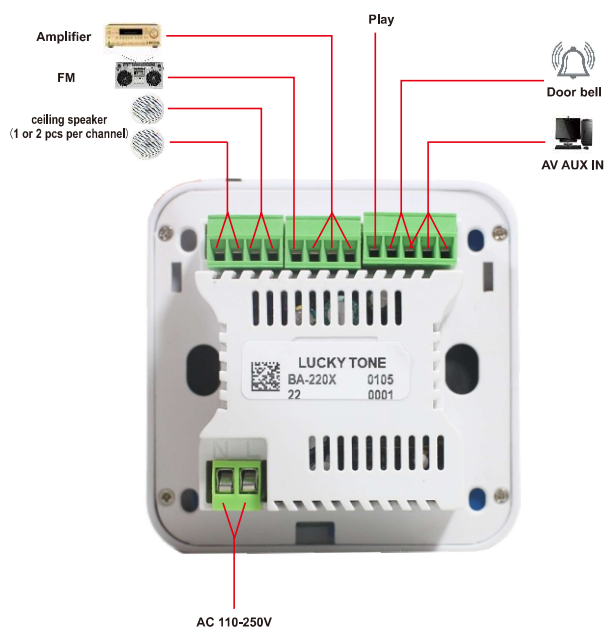

Set sell solution available



SPECIFICATIONS	BA-220X	BA-420X
Output power	2*20W	4*20W
Speaker Impedance	4-8ohm	
Expand TF card memory	32GB	
Display	1.7inch LCD screen	
Resolution	480*480 IPS	
Bluetooth wireless range	≤10M	
USB	Micro USB	
THD	0.03% (1W.1KHZ)	
Frequency response	20 Hz-20 kHz (+/-2dB)	
SNR	98db	
Music format	Mp3, WMA, WAV, AAC, WAW, APE, etc.	
Video format	MPEG-1/2/3/4, RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H, 264, etc.	
Photo format	JPG, BMP, GIF, PNG, etc.	
Power Requirements	110-250VAC	
Dimension	86*86*12mm	
Weight	132g	