



2 & 4 -CH Bluetooth wall amplifier with Color Screen



White color as default golden and black color optional

Features:


- ▶ Adopt Bluetooth wireless connection technology
- ▶ Built-in all-digital auto-tuning radio, 30 radio stations
- ▶ Support play songs automatically when power on
- ▶ Standard 86 Mounted on the wall for easy control
- ▶ With wireless remote control
- ▶ Support linkage trigger doorbell
- ▶ Support USB and SD card storage
- ▶ Support audio input and output function with secure and fast connect phoenix connectors
- ▶ Color LCD display, and light touch button rim for easy control of the music system
- ▶ Suitable for homes, commercial areas, kid's room, etc.
- ▶ RS 485 for third party system integration(2-CH)



bars, restaurants

Description:

This 2-4 channel small bluetooth multi-home audio system equipped with micro USB/TF can power 2 to 8 pieces of speakers in your home or small commercial area. It uses a high-efficiency class-D amplifier for a maximum output of 2*25 or 4*25 watts, low-impedance speakers. The cool display shows relevant track music info. Plus, you can control everything - seek, change tracks, and adjust the volume - using the included wireless infrared remote controller.

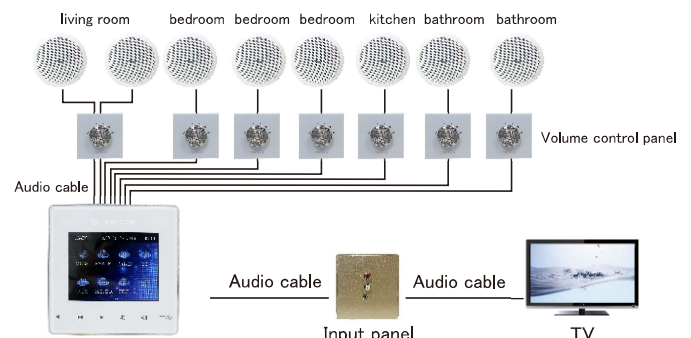

Wall amplifier

Default link with 4pcs of speakers. For 8 speaker connection, please use 8ohm speaker and adopt series connection.

SPECIFICATIONS	BA-225	BA-425
Output power	2*25W	4*25W
Speaker Impedance	4-8ohm	
Expand TF card memory	32GB	
Display	2.8 inch LCD display	
Resolution	480*480 IPS	
Bluetooth wireless range	≤10M	
USB	OTG USB, 32G can be read	
THD	0.03% (1W.1KHZ)	
Frequency response	20 Hz-20 kHz (+/-2dB)	
SNR	98db	
Music format	Mp3, WMA, WAV, AAC, WAW, APE, etc.	
Video format	MPEG-1/2/3/4, RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H. 264, etc.	
Photo format	JPG, BMP, GIF, PNG, etc.	
Power Requirements	110-250VAC	
Dimension	86*86*11mm	
Weight	0.42kg	