



2CH Bluetooth wall amplifier with lighting controls




Description:

This 2 channel small bluetooth multi-home audio system equipped with micro USB/TF can power 2 to 8 pieces of speakers in your home or small commercial area. It uses a high-efficiency class-D amplifier for a maximum output of 2*25 watts, low-impedance speakers. Plus, you can control everything – seek, change tracks, and adjust the volume – using the included wireless infrared remote controller.

What is more, its all-in-one function, has the power switch for 2 lights




White color as default golden optional

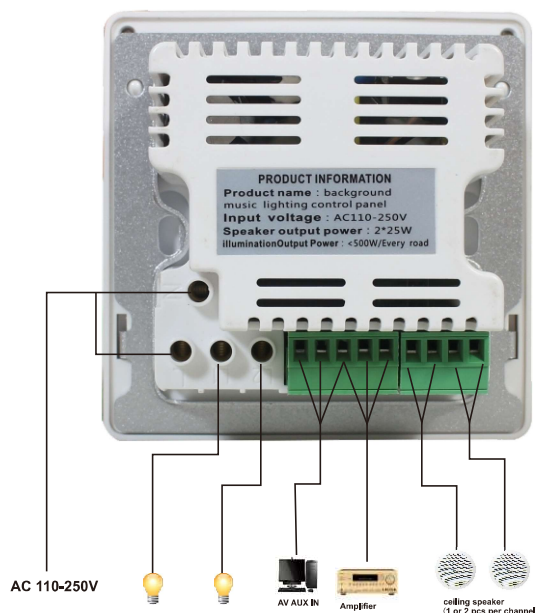

Features:

- ▶ Adopt Bluetooth wireless connection technology
- ▶ Standard 86 Mounted on the wall for easy control
- ▶ With wireless remote control
- ▶ 2.5D process glass with electroplated plastic border
- ▶ Elegant the light touch button
- ▶ Support play songs automatically when power on
- ▶ Support audio input and output function with secure and fast connect phoenix connectors
- ▶ Suitable for villa, homes, commercial areas, kid's room, etc.

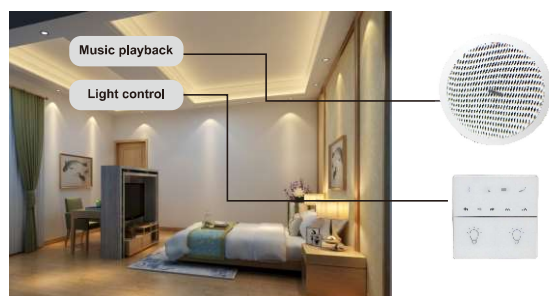

SPECIFICATIONS	BA-225LT
Output power	2*25W (Yamaha Digital Amplifier)
Speaker Impedance	4-8ohm
Expand TF card memory	32GB
Panel	Transparent and tough crystal panel with 7 touch light buttons
Bluetooth wireless range	≤10M
USB	OTG USB, 32G can be read
THD	0.03% (1W, 1KHZ)
Frequency response	20 Hz-20 kHz (+/-2dB)
SNR	98db
Audio input/output	1/1
Illumination output Power	less than 500W per channel
Music format	Mp3, WMA, WAV, AAC, FL AC, WAW, APE, etc.
Power Requirements	110-250VAC
Color	White
Dimension	86*86*10mm
Weight	0.28kg

Functions

Control the lightings
Control the Background Music Playing