




2 & 4 -CH Bluetooth wall amplifier with Touchscreen

Description:

This 2-4 channel small bluetooth multi-home audio system equipped with micro USB/TF can power 2 to 8 pieces of speakers in your home or small commercial area. It uses a high-efficiency class-D amplifier for a maximum output of 2*25 or 4*25 watts, low-impedance speakers. The cool display shows relevant track music info. Plus, you can control everything - seek, change tracks, and adjust the volume - using the included wireless infrared remote controller.



BA-225TC

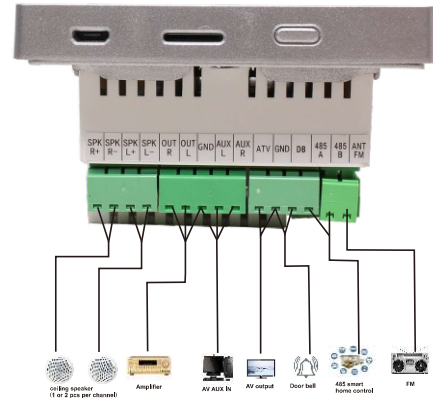


Features:

- ▶ Adopt Bluetooth wireless connection technology
- ▶ Built-in all-digital auto-tuning radio, 30 radio stations
- ▶ Standard 86 Mounted on the wall for easy control
- ▶ With wireless remote control
- ▶ Support linkage trigger doorbell input
- ▶ RS485 integration with third party system(2-CH)
- ▶ High sensitivity 4 inch touch screen
- ▶ Support audio input and output function with secure and fast connect phoenix connectors
- ▶ Suitable for homes, commercial areas, kid's room, etc.

Set sell solution available



BA-425TC

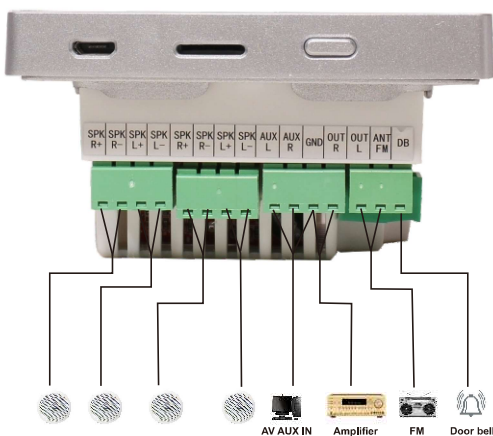

SPECIFICATIONS

	BA-225TC	BA-425TC
Output power	2*25W	4*25W
Speaker Impedance	4-8ohm	
Expand TF card memory	32GB	
Display	4inch capacitive touch screen	
Resolution	480*480 IPS	
Bluetooth wireless range	≤10M	
USB	OTG USB, 32G can be read	
THD	0.03% (1W,1KHZ)	
Frequency response	20 Hz-20 kHz (+/-2dB)	
SNR	98db	
Sound effect	Ordinary, rock, classical, jazz, pop, etc.	
Music format	Mp3, WMA, WAV, AAC, WAW, APE, etc.	
Video format	MPEG-1/2/3/4, RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H, 264, etc.	
Photo format	JPG, BMP, GIF, PNG, etc.	
Power Requirements	110-250VAC	
Dimension	86*86*11mm	
Weight	0.42kg	